
UNITÉS DE CONTRÔLE D'ACCÈS

Salto SVN Online – Unité de contrôle CU42E0

Cette unité de contrôle facilite encore davantage l'intégration d'un système de contrôle d'accès de haut niveau dans vos locaux, grâce à la capacité de contrôle et de gestion de multiples portes par le biais d'une connexion Ethernet et d'une adresse IP. Ainsi, l'extension des avantages de la technologie de contrôle d'accès Salto à toutes les portes sur lesquelles l'installation d'un ensemble plaque béquille électronique autonome s'avère impossible (gâches électriques, aimants, barrières, ascenseurs, etc.), est encore plus facile et plus économique.

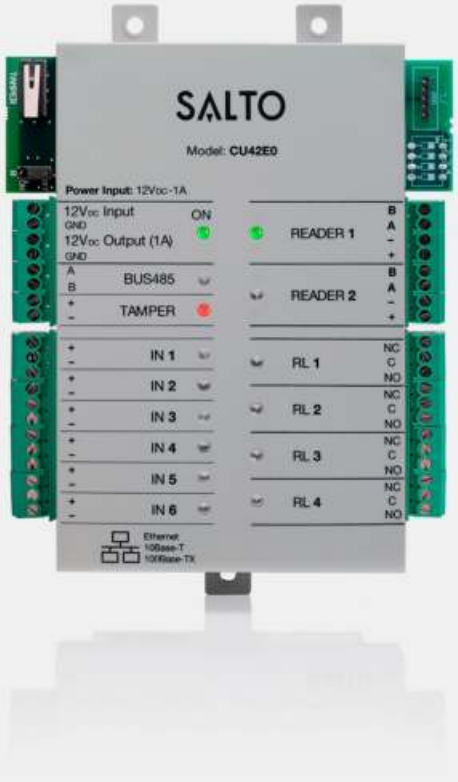


Fonctionnalités

- Unité de contrôle de porte on-line basée sur un réseau TCP/IP.
- Fonctionnement en réseau virtuel grâce à la technologie des données dans le badge via le Réseau Virtuel Salto (Salto SVN).
- Connexion de deux lecteurs muraux pouvant être configurés en tant que deux portes distinctes ou en tant que lecteur de l'entrée et lecteur de la sortie.
- Possibilité de commander jusqu'à 4 unités de contrôle Salto auxiliaires et de gérer jusqu'à 10 portes.
- Mode anti-passback
- Contrôle de porte et contrôle d'utilisation abusive par le biais de contacts d'entrée (alarme intrusion et alarme porte laissée ouverte).
- Compatible avec la carte d'extension relais Salto (CU4EB8) pilotant jusqu'à 128 relais de sortie
- Compatible avec le module « événement d'alarme » Salto SPACE ProAccess qui permet de gérer le déclenchement des événements via des entrées ou des événements d'audit.

Caractéristiques techniques

- Connexion au réseau via une connexion Ethernet 100BASE-T.
- 4 relais de sortie.
- 6 entrées pour connecter :
- Détecteur de porte, commutateur de demande de sortie (RTE), commutateur bureau, commande de volet roulant, dispositif anti-intrusion.
- 2 entrées pour dispositif anti-sabotage (entrée, commutateur).
- La longueur de câble maximale entre l'unité de contrôle de porte et le lecteur mural est de 400 mètres.1
- Connexion au lecteur mural assurée par un câble à 4 paires torsadées.
- Consommation requise : 12 V DC 400 mA (sans lecteur Salto) par un adaptateur.

Schémas techniques

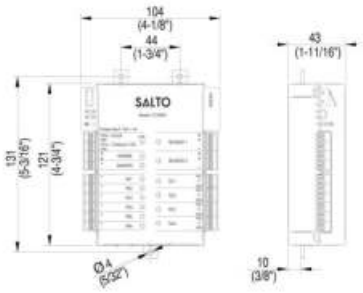

Plateformes technologiques

Salto Space

Réseau sur site

Copyright @ 2026 SALTO Systems S.L. All rights reserved

Technologies radio-fréquence

RFID NFC Bluetooth

Certifications

Supports



Badge

NXP MIFARE®
HID®



Médaillon

NXP MIFARE®



Clé Digitale

Bluetooth LE
NFC – Near Field Communication

Copyright @ 2026 SALTO Systems S.L. All rights reserved

Clause de non-responsabilité:

For a complete description of the product range, verification of the availability and technical feasibility of the selected product, and a commercial offer, please get in touch with the local authorized Salto dealer or a Salto office.

Salto reserves the right to modify the product and its components.

Technical information and images displayed on the Salto product page are for informative purposes only and designed to inform about the main product features, options and technical specifications. Therefore, all images, illustrations, shapes, features, specifications, sizes, data, descriptions and colours shown on the Salto Systems page shall consider as no-binding approximate indications only.

Part of the content of this document may have been generated or assisted by artificial intelligence tools. This document may also include automatic or manual translations provided exclusively for informational purposes, which may contain errors or inaccuracies. Salto does not guarantee the accuracy, quality, or reliability of such content or translations, including those generated by AI.

The User is responsible for verifying the information contained in this document and, in case of doubt, must refer to the original English version, which shall prevail in the event of any discrepancy. Other language versions are provided for informational purposes only.

Although Salto makes reasonable efforts to review the content of its downloadable documents, they may contain errors or omissions. Salto assumes no liability arising from the User's use, interpretation, or decisions made based on the information contained in this document, which is used at the User's sole responsibility.

For more detailed information on the use of artificial intelligence, translations, and applicable limitations of liability, please refer to the "Terms of Use of our Website".

Copyright @ 2026 SALTO Systems S.L. All rights reserved